

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
5 June 2003 (05.06.2003)

PCT

(10) International Publication Number
WO 03/046495 A1

(51) International Patent Classification⁷: **G01J 3/28**

(21) International Application Number: PCT/US02/37057

(22) International Filing Date:
19 November 2002 (19.11.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/991,038 21 November 2001 (21.11.2001) US

(71) Applicant: **DELTA E** [US/US]; 6822 Del Monte Avenue,
Richmond, CA 94805 (US).

(72) Inventor: **GRANGER, Edward, M.**; 43 Wembly Road,
Rochester, NY 14616 (US).

(74) Agents: **HSUE, James, S.** et al.; Skjerven Morrill LLP,
Three Embarcadero Center, 28th Floor, San Francisco, CA
94111 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: REFRACTIVE-DIFFRACTIVE SPECTROMETER

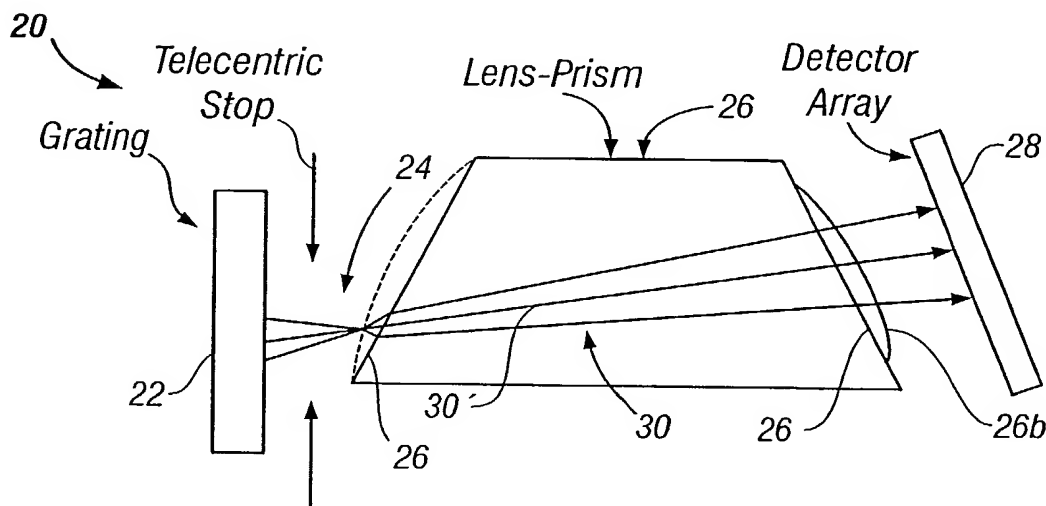

(57) Abstract: A diffraction grating (22) and a prism (26) with the appropriate characteristics are employed to provide a combined dispersive characteristic that is substantially linear over the visible spectrum. Radiation from the grating (22) and prism (26) is collimated by a lens (26b) towards a detector array (28). The grating (22) or a telecentric stop between the grating (22) and prism (26) is placed at a focal point of the lens (26b) in a telecentric arrangement so that equal magnification is achieved at the detector array (28). If the detector array (28) is replaced by a plurality of optical channels, a multiplexer/demultiplexer is obtained



WO 03/046495 A1

REFRACTIVE-DIFFRACTIVE SPECTROMETER

BACKGROUND OF THE INVENTION

5 [0001] This invention relates in general to spectrometers and, in particular, a refractive-diffractive spectrometer.

[0002] Spectrometers or spectrophotometers are widely used devices. They are used in digital printers and printing presses. Hand-held spectrometers are used by graphic designers and imaging departments at newspapers, magazines, and copy shops.

10 [0003] In order to analyze the spectro data from images or objects, light from the images or objects is passed through optical elements to a detector, such as a charged coupled device ("CCD") array. In order to accurately measure the CIE tristimulus values of light sources, images or objects, it would be desirable to accurately resolve all of the wavelength components in the radiation from the light source. Spectrometers resolve such wavelength components by dispersing them at different angles depending on the
15 wavelength. Unfortunately, up to the present time, spectrometers and spectrophotometers do not disperse the different wavelengths linearly. This means that after being dispersed by the spectrometer into the different wavelength components reaching the CCD array, the dispersion of a particular wavelength component is not proportional to the wavelength of the component. For example, if a prism is used in the spectrometer for dispersing the
20 wavelength components of radiation from a source, the angle of refraction of any wavelength component is not proportional to its wavelength.

[0004] Radiation from many light sources can have a large number of spectral lines or wavelength components. Therefore, unless the CCD array has the same number of detectors as the number of wavelength components, at least some of the spectral lines or
25 wavelength components of the light source will be directed to positions along the CCD array that does not fall entirely on any particular detector, but may fall partly on one detector and partly on another detector. Since the dispersion of the wavelength components is nonlinear, it cannot be assumed that a linear interpolation of the outputs of the two detectors will yield an accurate measurement of the intensities of such wavelength
30 components. This causes error in measurement. Therefore, to accurately measure the CIE tristimulus values of light sources of filters that have fine spectral detail, spectrometers of

the conventional design require higher spectral resolution. However, high quality spectrometers are expensive.

[0005] It is therefore desirable to provide improved spectrometers and spectrophotometers in which the above-described disadvantages are avoided.

5

SUMMARY OF THE INVENTION

[0006] This invention is based on the recognition that, by employing two optical elements having a combined dispersive characteristic such that they substantially linearly disperse electromagnetic radiation over at least a portion of an electromagnetic spectrum, the above-described disadvantages of conventional spectrometers and spectrophotometers can be avoided. In the preferred embodiment, a refractive element such as a prism and a diffraction grating may be employed. Preferably, the two optical elements are arranged so that the spectrometer is substantially telecentric; in such event, the spectrometer provides substantially the same magnification at different wavelengths in the spectrum. In other words, radiation energy will be dispersed also linearly across the portion of the electromagnetic spectrum.

[0007] Where the combined dispersive characteristic of the two elements is substantially linear, linear interpolation of the type described above would not introduce significant interpolation errors, in contrast to the conventional design of spectrometers. Therefore, even if high resolution CCD arrays are not used, radiation sources, images and objects having a rich spectrum can still be accurately measured. This drastically reduces the cost of the spectrometer.

[0008] Instead of actually detecting the different wavelength components, the wavelength components may be directed towards different optical channels in a demultiplexing arrangement. First, the light or radiation source may be an input optical channel carrying radiation of different wavelength components. After passing such wavelength components through the two optical elements, the wavelength components are dispersed substantially linearly. Therefore, irrespective of the wavelengths of the wavelength components in the input optical channel, one can be certain that a particular output channel is carrying a corresponding particular wavelength component. This is not possible if the combined dispersive characteristics of the two optical elements are not substantially linear. The above demultiplexing arrangement is bidirectional. In other words, the separate output channels in the above demultiplexing arrangement can instead become input channels. The wavelength components in such separate input channels, after

passing through the two elements, will emerge as a combined beam towards the output channel (the input channel in the demultiplexing arrangement) in a multiplexer arrangement. Again, since the combined dispersive characteristic of the two elements is substantially linear, the different wavelength components will be combined into a single beam by the two elements irrespective of the wavelengths of the different input wavelength components.

BRIEF DESCRIPTION OF THE DRAWINGS

- [0009] Fig. 1A is a graphical plot of the natural spectral dispersion of a diffraction grating useful for illustrating the invention.
- [0010] Fig. 1B is a graphical plot of the natural dispersion of an optical prism useful for illustrating the invention.
- [0011] Fig. 1C is a graphical plot of the dispersion of the combination of a diffraction grating and a prism.
- [0012] Fig. 2A is a schematic view of the influx optics portion of a spectrometer to illustrate a preferred embodiment of the invention.
- [0013] Fig. 2B is a schematic view of the spectrometer section of the embodiment of Fig. 3A.
- [0014] Fig. 3A is a schematic view of a diffraction grating, a prism and a lens to illustrate one combination of optical elements in the spectrometer to illustrate the invention.
- [0015] Fig. 3B is a schematic view of a combined grating-prism-lens structure in an embodiment to illustrate still another embodiment of the invention.
- [0016] Fig. 4 is a schematic view of a filter portion of the spectrometer to illustrate another aspect of the invention.
- [0017] Fig. 5A is a schematic view illustrating the relative positions of the entrance slit image and of the exit slit or detector to illustrate conceptually the operation of the invention.
- [0018] Fig. 5B is a graphical plot of the intercepted area of Fig. 5A versus wavelength to illustrate the operation of the invention.
- [0019] Fig. 6 is a graphical plot of the relative signal obtained by interpolation to illustrate an aspect of the invention.
- [0020] Fig. 7 is a graphical plot of the percent metameric error versus bandwidth to illustrate the invention.

[0021] Fig. 8 is a schematic view of a demultiplexer/multiplexer to illustrate another aspect of the invention.

[0022] For simplicity in description, identical components are labeled by the same numerals in this application.

5

DETAILED DESCRIPTION OF THE EMBODIMENTS

[0023] Fig. 1A is a graphical plot of the natural spectral dispersion of a divergent light diffraction grating. As shown in Fig. 1A, a diffraction grating has higher dispersion of longer wavelength components compared to the shorter wavelength components in the visible spectrum. Thus, as shown in Fig. 1A, wavelength components at or near the red end of the spectrum are dispersed by a greater amount compared to wavelength components towards the blue end of the spectrum. Fig. 1B is a graphical plot illustrating the natural dispersion of optical prisms. As shown in Fig. 1B, the dispersion of prisms has the opposite characteristic compared to gratings. Prisms disperse wavelength components at or near the blue end of the visible spectrum by a greater amount compared to other wavelength components. Therefore, by employing both a grating and a prism, the combined dispersive characteristic can be made to be uniform over the entire visible spectrum, as illustrated in Fig. 1C.

[0024] The spectrometer of this invention is based on using refraction and a transmissive (or reflective) diffraction grating to produce an efficient and compact spectrometer. The design goal is a linear wavelength dispersion and constant spectral bandwidth. The goals are achieved by using a transmission grating in conjunction with a new form of a lens-prism. A grating, which has high dispersion in the red region of the spectrum, is combined with a lens-prism that has high dispersion in blue spectral region results to produce constant spectral dispersion as shown in Fig. 1C in the same manner just as one would do to achromatize a multi-element lens. The slit magnification is maintained by use of a telecentric stop in the lens-prism. The stop is placed at or near the diffraction grating. The telecentric system maintains a constant $F/\#$ across the spectrum and therefore constant slit magnification. The telecentric system has the additional advantage that the detector array is illuminated normal to the array. This configuration minimizes cross talk between array elements. Alternatively, while the rays may remain substantially normal to the detector array, to avoid back-reflection, it may be desirable to slightly tilt the rays or the array so that the rays are at small angles to the normal direction to the array.

[0025] With this brief description, the system and the design will be explained in subgroups:

Influx Optics

[0026] The influx optics 10 comprises a field lens 12, a slit 14 and a collimator 16 as shown below in Fig. 2A. The field lens is placed just in front of the slit (slit can also be integrated with the lens) to collect light from the target 18 and the slit is placed substantially at a focal point of collimating lens 16. The function of the field lens is to image the collimating lens to the sample area or target 18. With this configuration, all of the light from the sample area 18 that passes through the spectrometer entrance slit also passes through the collimating lens. This minimizes scattered light after the slit since all light leaving the slit will be directed toward the collimating lens.

[0027] The width of slit 14 defines the spectral resolution of the system. The slit height is chosen to fill the height of the elements of the detector array in the spectrometer section 20 of Fig. 2B. For a given spectral resolution, the slit width is the product of the focal length of the collimator and angular resolution of the grating of Fig. 2B. Once the spectral resolution and the target area are chosen the collimator dimensions are also defined. In one embodiment, a large slit and a long F/10.0 collimator are used. This makes both the slit and the lens easy to manufacture.

[0028] The collimating lens and the following stops define the field of view of the instrument at the target plane. The entrance slit 14 is placed substantially at a focal point of collimating lens 16 so that the collimating lens images the entrance slit to infinity so that the light falling on the grating is collimated (all light rays from a point are parallel). The grating could be illuminated with diverge light. Unfortunately, divergent light passing through the gating produces comatic aberration. The extra aberration would increase the bandwidth of the instrument as a function of wavelength.

The Spectrometer

[0029] The spectrometer section 20 has four parts: a grating 22, a telecentric stop 24, a lens-prism 26 and detector array 28, such as a CCD array. These elements are shown in Fig. 2B. The collimated light from the front section 10 passes through and diffracted, or is reflected and diffracted, by the grating and is dispersed into its spectral components as shown in Fig. 2B. These rays are further dispersed by the first surface of the lens-prism element. In one embodiment, the grating is ruled at 600 lines/mm. The grating frequency and the prism angle are part of the design optimization. The lens-prism comprises a prism

portion 26a and a lens portion 26b. The last variable in the optimization is the choice of which wavelength will strike normal to the second face 26' of the prism portion. It is this ray (the center ray 30' in Fig. 2) that is the optical axis of lens portion 26b that makes up the second face of the lens-prism. The grating frequency, prism angle and wavelength of the chief ray (optical axis) are chosen to produce a system with linear spectral dispersion. Any one of the commonly used optical component design programs may be used to provide a precise optical design for a system with linear spectral dispersion given the above inputs (grating frequency etc.) so that it is not necessary to describe the process in detail.

10 [0030] In one embodiment, the grating frequency is targeted to be in the range of 500 to 600 lines/mm. The frequency is kept low to minimize polarization efficiency differences. At higher frequencies polarization scramblers would be required to compensate for these polarization differences. The grating is blazed for the first order. The blaze angle is determined by the spectral sensitivity of the system. The wavelength of the maximum efficiency is placed where the system has the least sensitivity. In general the optimum solution is to have the same signal strength from each portion of the spectrum when reading a perfect white reference.

15 [0031] The lens-prism 26 is designed so that the first or higher order diffracted light is collimated and transmitted by the grating 22 and focused on the detector array 28. The length of the prism is determined by the focal length of the final lens surface of lens portion 26b. The face 26'' of the prism portion next to the grating is approximately at the infinity focus of the Lens-Prism. As shown in Fig. 2B, rays 30 of light leaving a point near the grating leave the final lens in a collimated state (parallel). This is the telecentric condition. To achieve such condition, the telecentric stop 24 is located at or substantially at a focal point of the lens portion 26b. If no stop 24 is employed, the grating 22 is located at or substantially at a focal point of the lens portion 26b. This enables substantially equal magnification of all wavelength components in all the rays 30. Surface 26'' may be aspheric as shown in dotted line in Fig. 2B to compensate for geometric aberration introduced by the collimating lens 16 of Fig. 2A.

25 [0032] The detector array 28 is positioned to be in focus at each wavelength and substantially perpendicular to the telecentric rays leaving the final lens surface of lens portion 26b. This position of the array 28 minimizes cross talk between elements and assures constant slit magnification and therefore constant spectral bandwidth at every detector site in the array.

[0033] While in the preferred embodiment, a lens-prism 26 is employed, it is also possible to use a separate prism and a separate lens instead, as illustrated in Fig. 3A. In such event, the telecentric stop 24 is placed at a focal point of lens 34. Where no stop 24 is used, grating 22 is placed at a focal point of lens 34. In the same manner as illustrated above in reference to Fig. 2A, 2B, grating 22 of Fig. 3A may act as a transmissive or reflective grating. In other words, light (preferably collimated) from the target may pass through and diffracted by grating 22 and proceed towards prism 32 and lens 34, or is reflected and diffracted by the grating. In any event, the first or higher order diffraction passes through prism 32 and lens 34 and is incident on a detector array such as array 28 (not shown). In still another arrangement, all three elements: the grating, the prism and the lens may be combined into a single optical element 40 as shown in Fig. 3B. In such event, the grating surface 40' is located substantially at a focal point of the lens portion 40'' of the element.

[0034] Fig. 4 is a schematic view illustrating a filter placed in front of the detector array 28 to further reduce cross-talk in the spectrometer of this invention. As shown in Fig. 4, the rays (such as rays 30 of Fig. 2B) that are directed towards the detector array are first passed through corresponding filter elements 50 before the filtered rays are then directed towards the detector array 28. While only seven filters 50 are shown in Fig. 4, comprising blue, blue-green, green, yellow, orange, red-orange and red filters, it will be understood that more or fewer filters may be employed, which is within the scope of the invention.

[0035] Explained below is the reason why the new Grating-Prism-Lens (GPL) Spectrometer of this invention has the colorimetric accuracy of a spectrometer with a much smaller bandwidth. A 1nm bandwidth conventional system is compared to a 10nm GPL system.

[0036] The GPL spectrometer (such as system 20 of Fig. 2B) has been designed to have two unique features. The first is that by using a prism combined with a grating, the dispersion of the system is made linear or substantially linear over the visual wavelength region of 400nm to 700nm. By using a prism combined with a grating, the dispersion of the system can also be made linear or substantially linear over a portion of the spectrum that includes wavelengths in the infrared or ultraviolet range. Thus, the spacing between 10nm samples occurs at equal distances in the image plane. Second, the use of the telecentric condition produces a system that has constant magnification of the slit for all

wavelengths. Therefore, an array detector with 10nm spacing between detectors will be just filled with light by a line source that is at the center wavelength of the detector.

[0037] Fig. 5A illustrates how the image of the entrance slits, from wavelengths differing from the center wavelength of the detector element, move across the array element. The detector element acts as the exit slit of the system. Fig. 5A shows how much of the light is intercepted for each of the line spectra. The images 14' of the slit 14 of Fig. 2B on the exit slit (detector) are shown for wavelength differences of -6nm, -3nm, 0.0nm, 3nm and 6nm. The amount of energy intercepted by the exit slit is directly proportional to the difference between the center wavelength of the exit slit position and the wavelength of the entering light. Therefore, if the wavelength difference is zero, all the light from the entrance slit will fall on the exit slit. As is shown in the plot on Fig. 5B, the amount of light intercepted by the exit slit is a linear function of the difference between wavelengths. The amount of light intercepted by the exit slit is zero for differences of 10nm or greater. The amount of light falling on a detector is a triangular function of the difference in wavelength between the center wavelength and the wavelength of the entering light.

[0038] The GPL is different from other spectrometer configurations. All others have some form of uncorrected dispersion. As such, none of them exhibit the natural interpolation abilities of the GPL spectrometer. All other spectrometers require higher spectral resolution to accurately measure the CIE tristimulus values of source or filters that have fine spectral detail. The GPL spectrometer can determine the CIE tristimulus values of line spectra without the need to resolve the line spectra. The next section illustrates the ability of the GPL system.

25 **GPL CIE Tristimulus Determination**

[0039] Spectrometers in use today require a resolution of 1nm to determine the tristimulus values of sources that have line spectra included in a continuum spectrum. Fluorescent lamps and monitor phosphors are good examples of problem sources that normally require high spectral resolution. The GPL spectrometer has the ability of obtaining accurate CIE tristimulus values without the need to resolve the spectral lines. Since all radiation is just the sum of an infinite number of spectral line sources, the GPL will yield accurate tristimulus values for all light distributions. The following discourse will illustrate the ability of the GPL system to produce exact CIE tristimulus values for an infinitesimal width spectral line source.

[0040] Fig. 6 shows the spectral response functions of two adjacent detectors in an array of detectors. An arbitrary and perfect line source is received by the GPL system that has a wavelength that is between these detectors. The source wavelength is assumed to be placed at a distance α times the spectral distance between the adjacent detectors.

5 [0041] A perfect spectrometer with a small enough bandwidth is assumed to resolve the source given above. One would then know the exact center wavelength of the source and the energy of the source, E_s . The tristimulus value of the source would be computed by linear interpolation. The known source wavelength lies between two wavelengths where the CIE color mixing functions have been tabulated. The tristimulus value is given
10 by linear interpolation:

$$T = M1*E_s*(1-\alpha) + M2*E_s*\alpha \quad (1)$$

where $M1$ is the color mixing function at the lower wavelength and $M2$ at the upper
15 wavelength. The source wavelength lays a proportionate distance α from the lower wavelength.

[0042] Fig. 6 shows how the source is seen by the GPL spectrometer. The original energy passing through the entrance slit falls on both detectors. Detector 1 receives $E1$ amount of energy and detector 2 receives $E2$. The tristimulus value would be calculated as
20 follows:

$$T = W1*E1 + W2*E2 \quad (2)$$

From Fig. 6, one can see that the triangular band pass of GPL devise splits the energy, E_s ,
25 as follows:

$$E1 = E_s*(1-\alpha) \quad (3)$$

and

30

$$E2 = E_s*\alpha \quad (4)$$

Now if equations 3 and 4 are substituted for $E1$ and $E2$ in equation 2, we obtain:

$$T = W1*Es*(1-\alpha) + W2*Es*\alpha \quad (5)$$

[0043] This is the same result obtained by the spectrometer with infinite resolution. Therefore, if the use of the spectrometer is to determine the tristimulus values of a source, the GPL spectrometer will give the proper result. If the purpose is to accurately resolve the spectral components of the source, then the broad band GPL is not the appropriate tool.

Bandwidth Considerations

[0044] The final question in the design of the GPL device is the wavelength spacing of the samples. The choice was made to use 10nm spacing. This choice is a compromise between accuracy and sensitivity. The sensitivity of the instrument increases with increase of bandwidth. Unfortunately the metamerism error in the computation of tristimulus values increases with spectral bandwidth. Triangular filtering a 1nm table of color mixing functions to a 3, 10 and 20nm bandwidth simulated the optical actions of each spectrometer. The metameric error is calculated by subtracting the linear interpolated data from the true 1nm color mixing functions. Fig. 7 displays the increase of standard deviation of metameric error as a function of spectral bandwidth. A spectral resolution of 10nm is chosen as optimum compromise between sensitivity and metameric error. Note that the error difference between a 3nm and a 10nm bandwidth is small as compared with an instrument with a 20nm bandwidth.

[0045] The GPL spectrometer has been designed to have linear dispersion and constant slit magnification over the spectral region of 400 to 700nm. As a result the instrument can measure the CIE Tristimulus values of sources that contain very spiky spectral components. An analysis is made of the metameric error in the weighting functions as a result of using the triangular spectral band pass as an interpolator. It is found that 10nm was the upper limit of the allowed spectral band pass to limit metameric error to a value of .001639 RMS of the true value of the color mixing functions. This value is only slightly larger than a system with a 3nm bandwidth.

Multiplexer/demultiplexer

[0046] The above-described diffraction grating and prism may also be used in optical multiplexers and demultiplexers as illustrated in Fig. 8. Thus, in reference to Figs. 2A and 2B, if the radiation or light collected by field lens 12 originates from an optical channel

such as an optical fiber, such radiation is collected by lens 12 in the same manner as that described above. Radiation from collimator 16 then undergoes diffraction and other optical operations in Fig. 2B, except that instead of being detected by a detector array 28, each of the rays 30 is collected by a corresponding output optical channel. In other words, the different wavelength components from an input optical channel is dispersed into its different wavelength components where each wavelength component is then collected by a corresponding output optical channel, thereby functioning as an optical demultiplexer.

[0047] Thus, as shown in Fig. 8, each of the three arrows 102 is an input optical channel. For each input optical channel 102, there is a corresponding optical system comprising lens 12, slit 14, collimator 16, grating 22, stop 24, lens-prism 26 and the separated wavelength components are collected by a plurality of three output optical channels. While only three output optical channels 104 are shown collecting the wavelength components originating from each input optical channel 102, fewer or more output optical channels may be employed and is within the scope of the invention. Thus, output optical channels 104' are used to collect rays 30 that originate from input optical channel 102', and direct these optical signals to corresponding receivers (not shown). The same advantages of linear dispersion and equal magnification can advantageously be used in the demultiplexer 100. Since the dispersion is linear, it would be easy to identify the spacing and location of the output optical channels 104, if the expected wavelengths of the input radiation is known. It would then be much simpler to design the demultiplexer 100. Since system 100 provides substantially the same magnification for all wavelength components, there would be little or no distortion or unequal reduction of intensity of the wavelength components between the different wavelength components in the different output channels.

[0048] As shown in Fig. 8, where the input and output optical channels are optical fibers, a GRIN lens (not shown) may be used as an optical interface for each of the optical channels in Fig. 8.

[0049] The passage of radiation in system 100 is bidirectional. This means that system 100 may also function as a multiplexer by converting each of the input optical channels 102 into output optical channels and the output optical channels 104 into input optical channels. In such event, the different wavelength components carried by the input optical channels 104' would then be combined and directed towards the output optical channel 102' in such multiplexer. Again, if the optical channels are optical fibers, GRIN lenses may be employed as optical interfaces.

[0050] While the invention has been described above by reference to various embodiments, it will be understood that changes and modifications may be made without departing from the scope of the invention, which is to be defined only by the appended claims and their equivalent. For example, while it is preferred to employ a refractive
5 element and a grating so that their combined dispersion is substantially linear, it may be adequate for some applications where the combined dispersion over at least a portion of an electromagnetic spectrum is not linear, but nevertheless more even than by only one of the two elements. All references referred to herein are incorporated by reference in their entireties.

10

WHAT IS CLAIMED IS:

1. An apparatus, comprising at least a first and a second element that disperse electromagnetic radiation according to wavelength, said at least two elements having a combined dispersive characteristic such that they substantially linearly disperse the electromagnetic radiation over at least a portion of an electromagnetic spectrum.
2. The apparatus of claim 1, said at least two elements including a refractive element and a grating.
3. The apparatus of claim 2, wherein said at least two elements include a prism.
4. The apparatus of claim 1, wherein said portion of the spectrum includes wavelengths in the infrared or ultraviolet range.
5. The apparatus of claim 1, wherein said apparatus provides substantially the same magnification of the entrance slit at the detector array at different wavelengths in the spectrum.
6. The apparatus of claim 5, wherein said at least two elements are arranged so that the apparatus is substantially telecentric.
7. The apparatus of claim 6, further comprising a lens, said at least two elements including a grating placed substantially at a focal point of the lens that focuses the electromagnetic radiation from the grating to a detector array.
8. The apparatus of claim 6, said at least two elements comprising a lens component, and a grating placed substantially at a focal point of the lens that focuses the electromagnetic radiation from the grating to a detector.
9. The apparatus of claim 8, said at least two elements comprising a prism integral with the lens component.

10. The apparatus of claim 6, further comprising a lens and an aperture stop, said at least two elements comprising a grating, said aperture stop being located in an optical path between the grating and the lens, said aperture stop placed substantially at a focal point of the lens that focuses the electromagnetic radiation from the aperture stop to a detector.

11. The apparatus of claim 6, further comprising an aperture stop, said at least two elements comprising a grating and a lens component, said aperture stop being located in an optical path between the grating and the lens, said aperture stop placed substantially at a focal point of the lens that focuses the electromagnetic radiation from the aperture stop to a detector.

12. The apparatus of claim 1, further comprising a lens, said at least two elements including a prism and a grating, wherein the prism, lens and grating are separate components.

13. The apparatus of claim 1, further comprising a lens, said at least two elements including a prism and a grating, wherein any two or more of the prism, lens and grating are combined to form a unitary single optical component.

14. The apparatus of claim 13, wherein the prism, lens and grating are combined to form a unitary single optical component.

15. The apparatus of claim 1, said at least two elements including a prism, a grating and a lens component integral with the prism.

16. The apparatus of claim 1, said at least two elements including a transmissive or reflective grating.

17. The apparatus of claim 1, further comprising an array of detectors, each detector sensitive for detecting a range of wavelengths of electromagnetic radiation in the spectrum from the at least two elements, and a filter corresponding to each detector in the array, such filter filtering out at least some of the wavelengths of electromagnetic radiation

that are not within the range of wavelengths of electromagnetic radiation of the corresponding detector.

18. The apparatus of claim 1, further comprising an array of detectors, wherein
5 the electromagnetic radiation at different wavelengths arrive at the array in substantially parallel rays.

19. The apparatus of claim 18, said array of detectors being substantially in a plane, wherein the rays of the electromagnetic radiation at different wavelengths arrive at the array in directions that are substantially normal to the plane.

10

20. The apparatus of claim 19, wherein directions of the rays of the electromagnetic radiation at different wavelengths arriving at the array are at small angles to a normal direction to the plane to avoid back reflection.

15 21. The apparatus of claim 1, said at least two elements comprising a prism having a surface receiving the electromagnetic radiation from a collimating lens, said surface being aspheric to compensate for geometric aberration introduced by the collimating lens.

20 22. An optical apparatus, comprising:
at least a first and a second element that disperse electromagnetic radiation according to wavelength, said at least two elements having a combined dispersive characteristic such that they substantially linearly disperse the electromagnetic radiation over at least a portion of an electromagnetic spectrum; and
25 input/output optical channels conveying electromagnetic radiation signals to or from the at least two elements, said at least two elements multiplexing or demultiplexing the electromagnetic radiation signals.

23. The apparatus of claim 22, said at least two elements including a refractive
30 element and a grating.

24. The apparatus of claim 23, wherein said at least two elements include a prism.

25. The apparatus of claim 22, wherein said portion of the spectrum includes wavelengths in the infrared or ultraviolet range.

26. The apparatus of claim 22, wherein said apparatus provides substantially
5 the same relative magnification of an entrance slit and an image thereof at the channels at different wavelengths in the spectrum.

27. The apparatus of claim 26, wherein said at least two elements are arranged
10 so that the apparatus is substantially telecentric.

28. The apparatus of claim 27, further comprising a lens, said at least two
elements including a grating placed substantially at a focal point of the lens that focuses
the electromagnetic radiation from the grating to channels, or from the channels to the
grating.
15

29. The apparatus of claim 27, said at least two elements comprising a lens
component, and a grating placed substantially at a focal point of the lens that focuses the
electromagnetic radiation from the grating to the channels, or from the channels to the
grating.
20

30. The apparatus of claim 29, said at least two elements comprising a prism
integral with the lens component.

31. The apparatus of claim 27, further comprising a lens and an aperture stop,
25 said at least two elements comprising a grating, said aperture stop being located in an
optical path between the grating and the lens, said aperture stop placed substantially at a
focal point of the lens that focuses the electromagnetic radiation from the aperture stop to
the channels, or from the channels to the stop.

32. The apparatus of claim 27, further comprising an aperture stop, said at least
30 two elements comprising a grating and a lens component, said aperture stop being located
in an optical path between the grating and the lens, said aperture stop placed substantially
at a focal point of the lens that focuses the electromagnetic radiation from the aperture stop
to the channels, or from the channels to the stop.

33. The apparatus of claim 22, further comprising a lens, said at least two elements including a prism and a grating, wherein the prism, lens and grating are separate components.

5

34. The apparatus of claim 22, further comprising a lens, said at least two elements including a prism and a grating, wherein any two or more of the prism, lens and grating are combined to form a unitary single optical component.

10

35. The apparatus of claim 34, wherein the prism, lens and grating are combined to form a unitary single optical component.

36. The apparatus of claim 22, said at least two elements including a prism, a grating and a lens component integral with the prism.

15

37. The apparatus of claim 22, said at least two elements including a transmissive or reflective grating.

38. The apparatus of claim 22, each channel carrying a wavelength component within a range of wavelengths of electromagnetic radiation in the spectrum from the at least two elements, and a filter corresponding to each channel, such filter filtering out at least some of the wavelengths of electromagnetic radiation that are not within the range of wavelengths of electromagnetic radiation of the corresponding channel.

20

39. The apparatus of claim 22, wherein the electromagnetic radiation at different wavelengths arrive at the channels in substantially parallel rays.

40. The apparatus of claim 39, said channels have ends substantially in a plane, wherein the rays of the electromagnetic radiation at different wavelengths arrive at or emerge from the array in directions that are substantially normal to the plane.

30




41. The apparatus of claim 40, wherein directions of the rays of the electromagnetic radiation at different wavelengths arriving at the array are at small angles to a normal direction to the plane to avoid back reflection.

42. The apparatus of claim 41, said at least two elements comprising a prism having a surface receiving the electromagnetic radiation from a collimating lens, said surface being aspheric to compensate for geometric aberration introduced by the
5 collimating lens.

43. An apparatus, comprising at least a first and a second element that disperse electromagnetic radiation according to wavelength, said at least two elements having a combined dispersive characteristic such that they disperse the electromagnetic radiation
10 over at least a portion of an electromagnetic spectrum more evenly than by only one of the two elements.

44. A method for measuring a radiation source, comprising:
passing radiation from the source to at least a first and a second element that
15 disperse electromagnetic radiation according to wavelength, said at least two elements having a combined dispersive characteristic such that they substantially linearly disperse the electromagnetic radiation over at least a portion of an electromagnetic spectrum; and
measuring wavelength components of the radiation that is dispersed by the
elements.

20
45. A optical method for multiplexing or demultiplexing electromagnetic radiation signals, comprising:
providing at least a first and a second element that disperse electromagnetic radiation according to wavelength, said at least two elements having a combined
25 dispersive characteristic such that they substantially linearly disperse the electromagnetic radiation over at least a portion of an electromagnetic spectrum; and
conveying electromagnetic radiation signals to or from the at least two elements, said at least two elements multiplexing or demultiplexing the electromagnetic radiation signals.

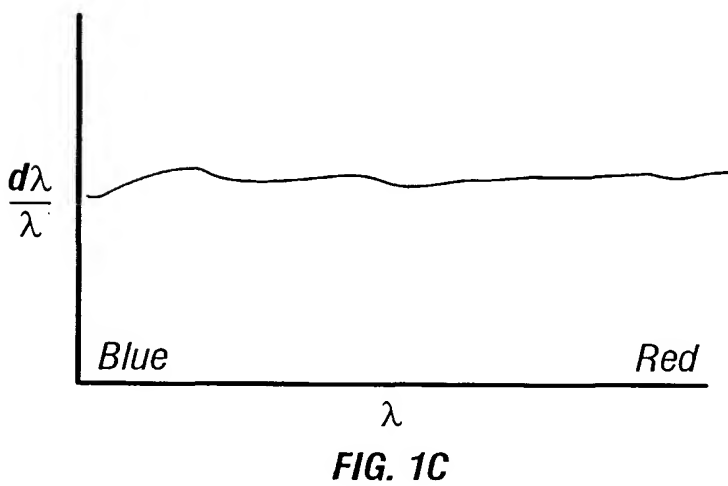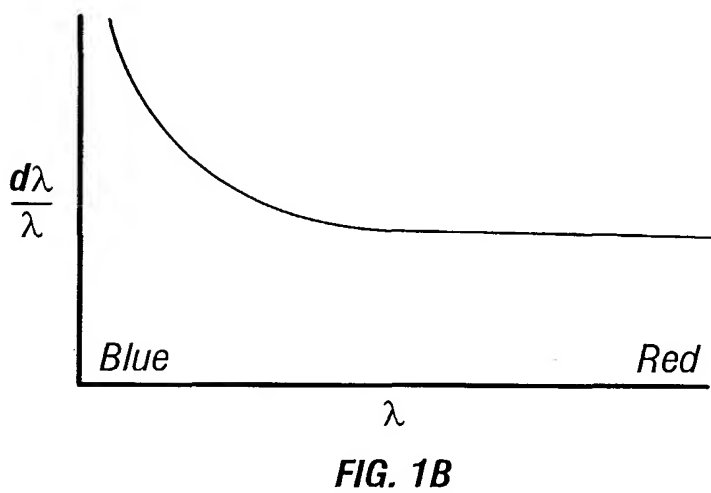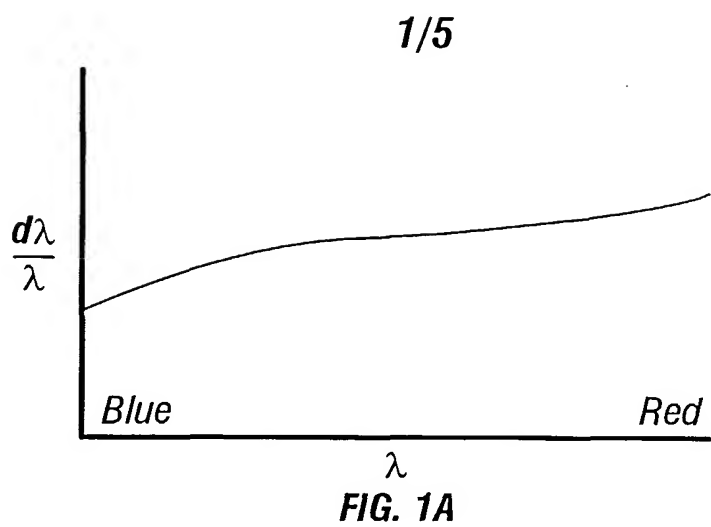

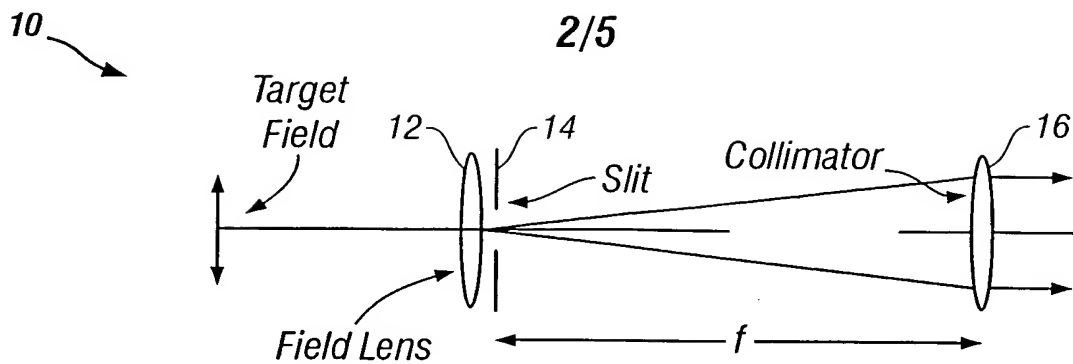


FIG. 2A

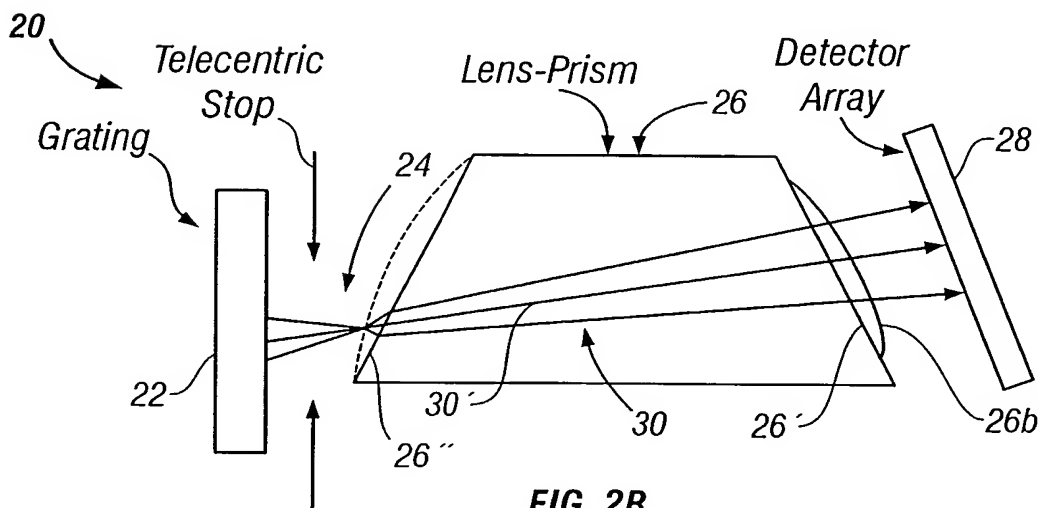


FIG. 2B

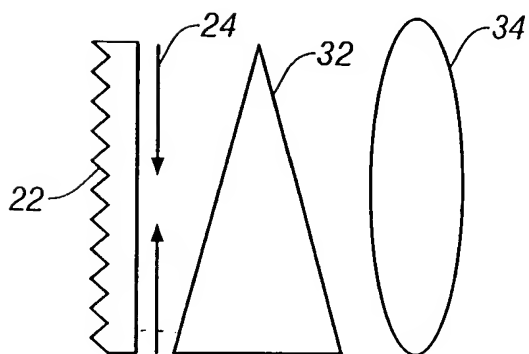


FIG. 3A

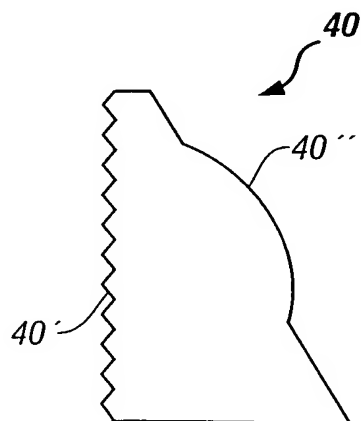


FIG. 3B

3/5

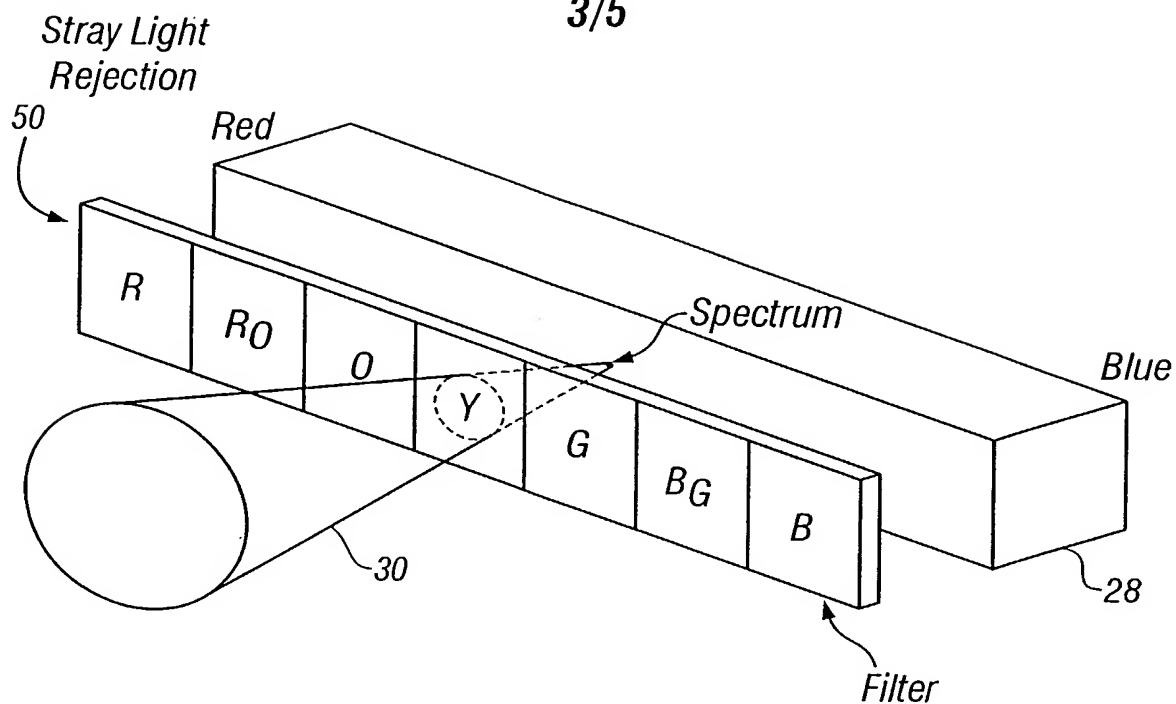


FIG. 4

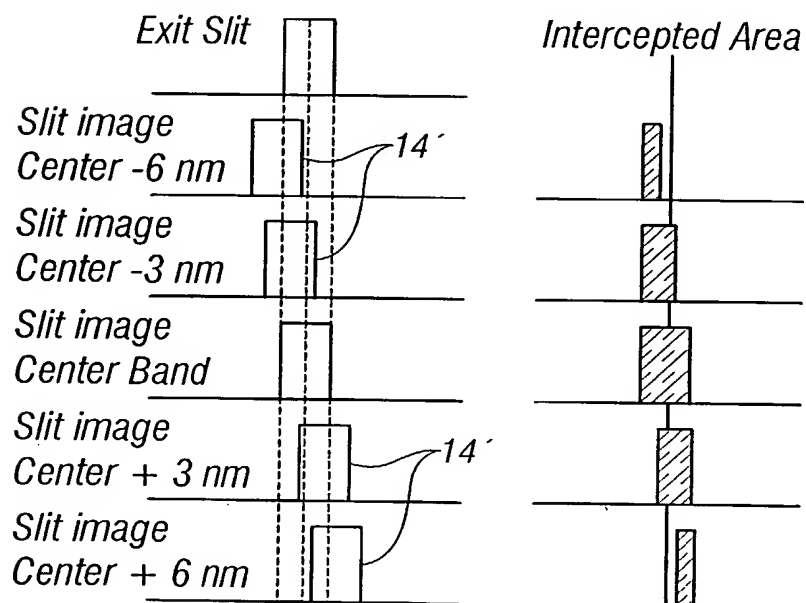


FIG. 5A

4/5

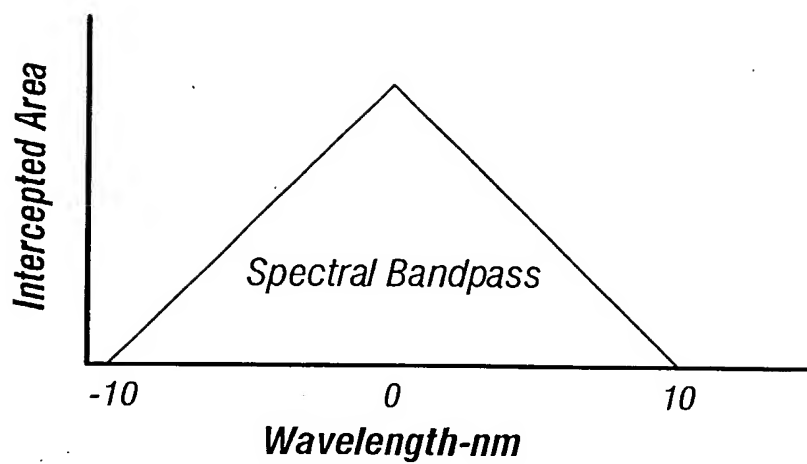


FIG. 5B

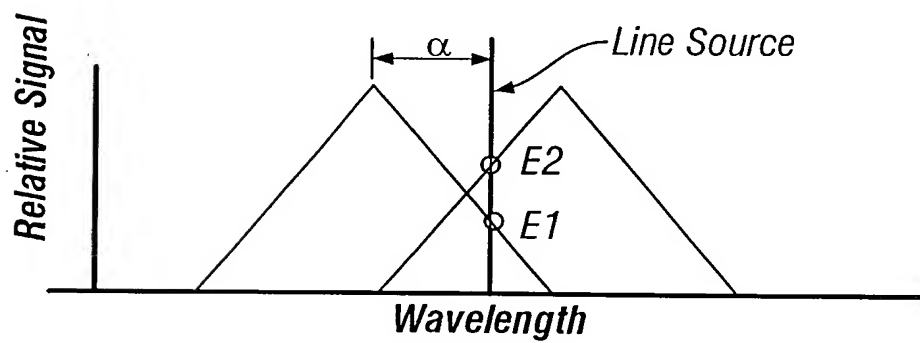


FIG. 6

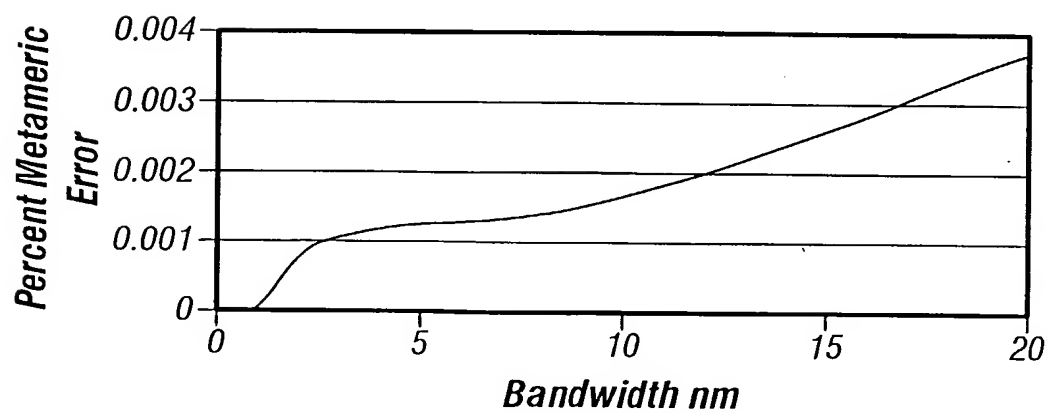


FIG. 7

5/5

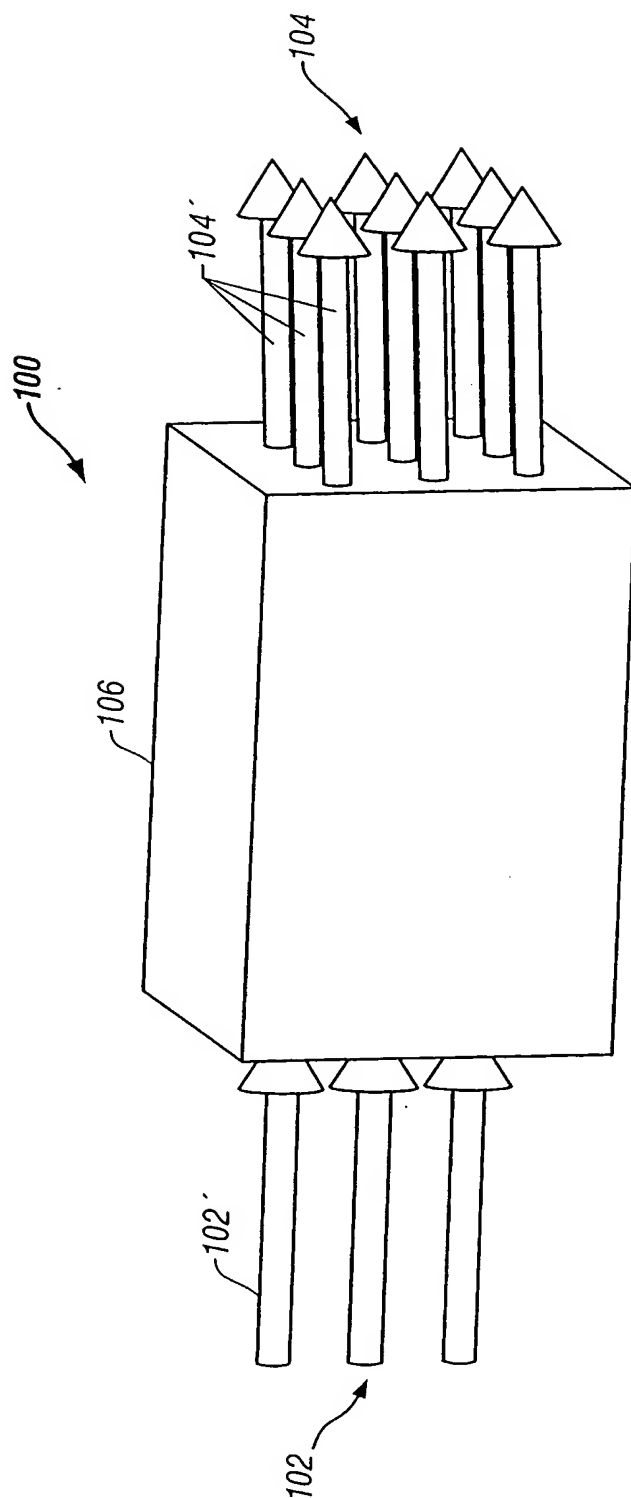


FIG. 8

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US02/37057

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : G01J 3/28

US CL : 356/328

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 356/326, 328, 331, 334

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
NONE

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
Please See Continuation Sheet

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X --- Y	JP 2000-304614 A (SUZUKI et al.) 02 November 2000 (02.11.2000), figures 1, 4; paragraphs 1-3, 8, 14-20, 29, 38.	1-5,12,13,16,18,19, 22-26,33,34,37,39, 40,43-45 ----- 14,15,17,20,35,36,38, 41
Y	US 5,424,826 A (KINNEY) 13 June 1995 (13.06.1995), figure 2b; column 4, lines 4-37.	14,15,35,36
Y	US 4,687,329 A (SCHULTZ) 18 August 1987 (18.08.1987), figure 2; column 5, lines 12-20.	17,38
Y	US 5,917,626 A (LEE) 29 June 1999 (29.06.1999), column 5, lines 33-36.	20,41
X --- A	US 5,781,290 A (BITTNER et al) 14 July 1998 (14.07.1998), figures 3, 4; column 2, lines 8-39; column 4, lines 53-67; column 7, lines 24-27.	1,4 ----- 6-11,21,27-32,42



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

05 February 2003 (05.02.2003)

Date of mailing of the international search report

04 APR 2003

Name and mailing address of the ISA/US

Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

KARA GEISEL

Telephone No. (703) 308-1782

Pamela Prust

INTERNATIONAL SEARCH REPORT

PCT/US02/37057

Continuation of B. FIELDS SEARCHED Item 3:

USPTO APS EAST

search terms: linear dispersion, linear displacement, diffraction grating, prism, grism, lens, back reflection, detector array, photodiode array, photodetector array